

TX-G3A140-010G

PRODUCT SPECIFICATION

Approved by: _____

Checked by: _____

Prepared by: _____

Part No.	TX-G3A140-010G	Spec No.	WKF-BA3070	Page	1 of 8
-----------------	----------------	-----------------	------------	-------------	--------

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd.

TYANSHINE 广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd.



广州市添鑫光电有限公司
Guangzhou Tianxin Photoelectric Co., Ltd.



Characteristics at $I_f=700mA$, $V_r=5V$ ($T_a=25^\circ C$)


Parameter	Symbol	Values			Units
		Min.	Typ.	Max.	
Luminous Flux	N_v	175	220	—	lm
Viewing Angle at 50 μ m IV	$2\ 1/2$	—	140	—	Deg
Peak Emission Wavelength	λ_p	—	515	523	nm
Dominant Wavelength	λ_d	520	522	530	nm
Spectral Line Half-Width	$\Delta\lambda$	30	35	40	nm
Forward Voltage	V_f	3.2	3.6	3.8	V
Reverse Current	I_R	—	—	10	μA
Thermal Resistance Junction to Case	R_{j-c}	—	—	—	$^\circ C/W$

Typical Electrical / Optical Characteristics Curves

(25 ° Ambient Temperature Unless Otherwise Noted)

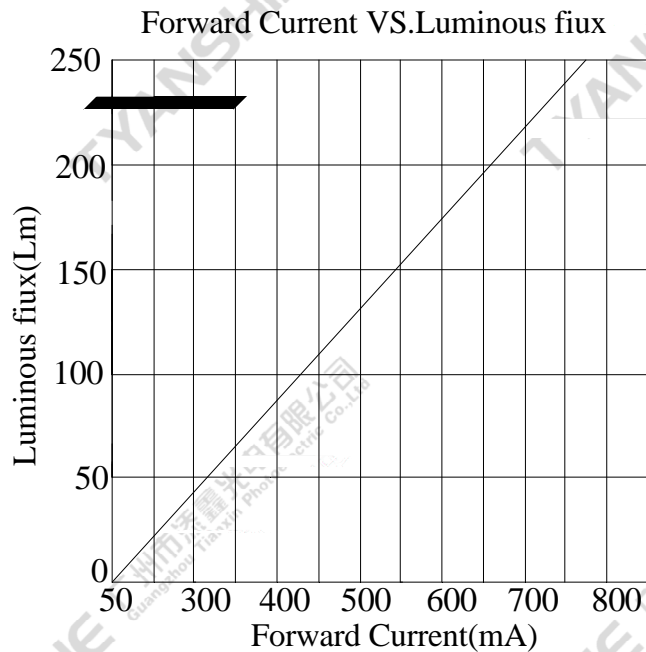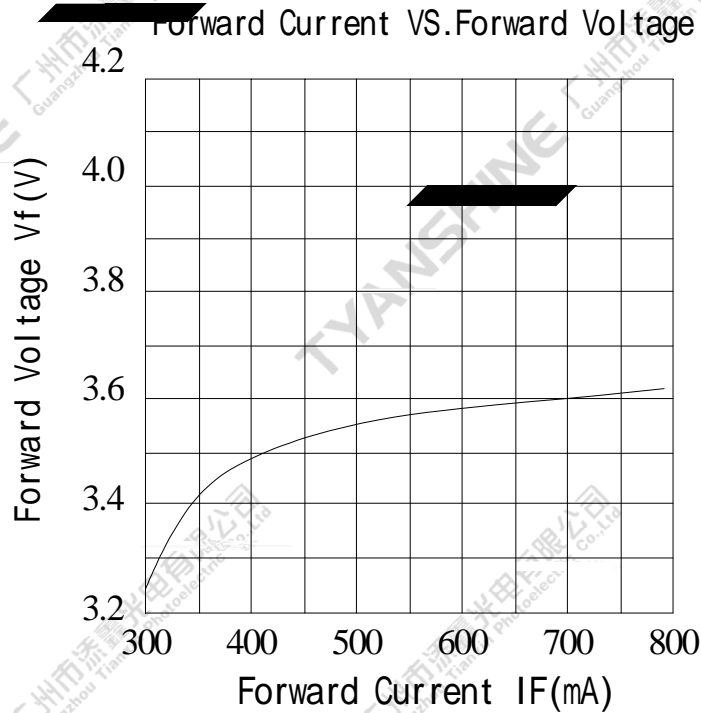

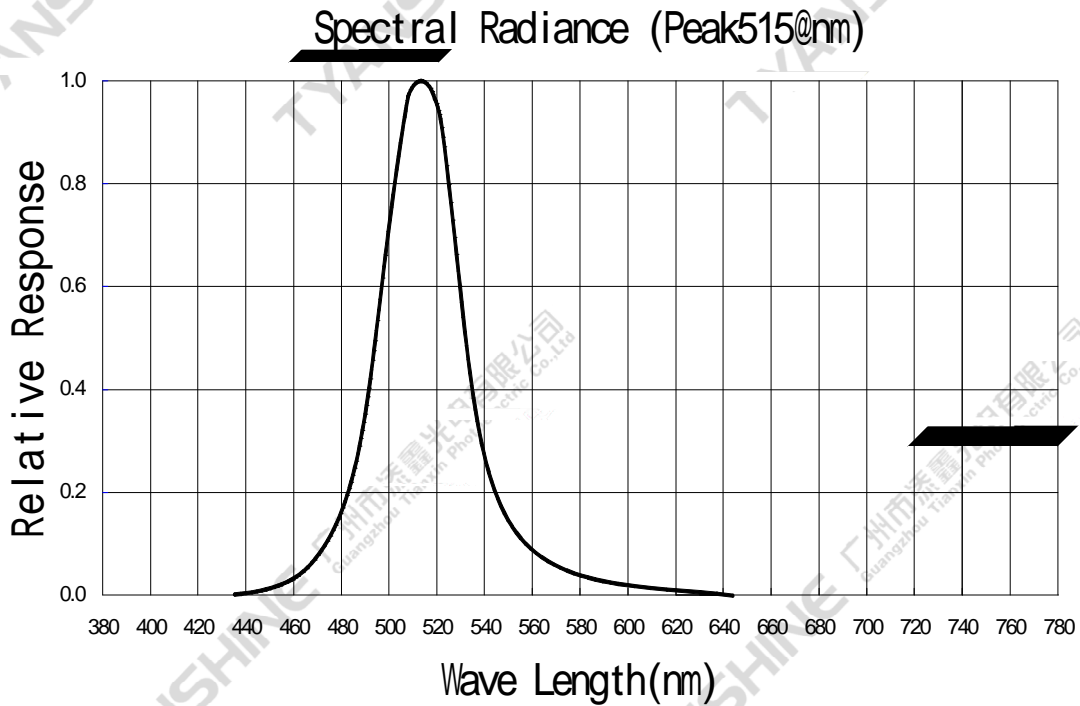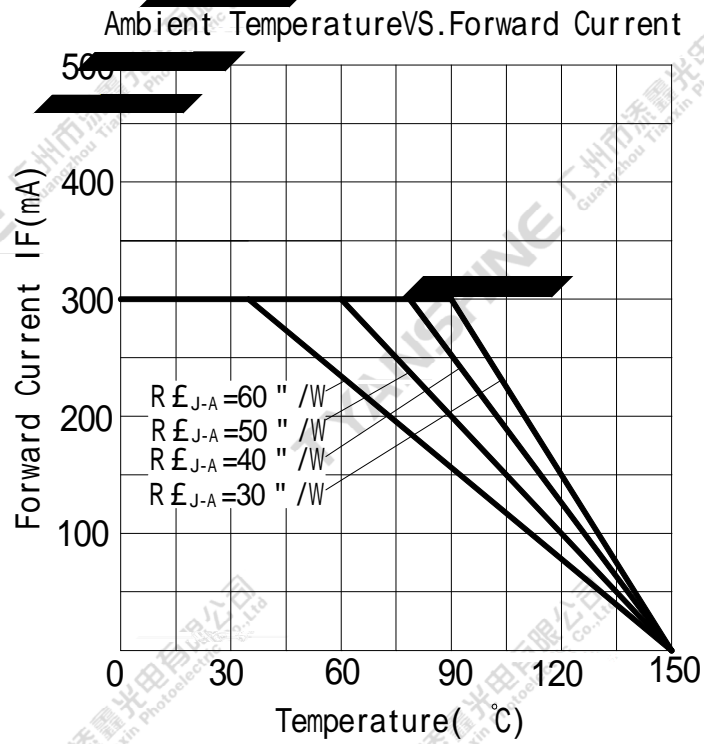

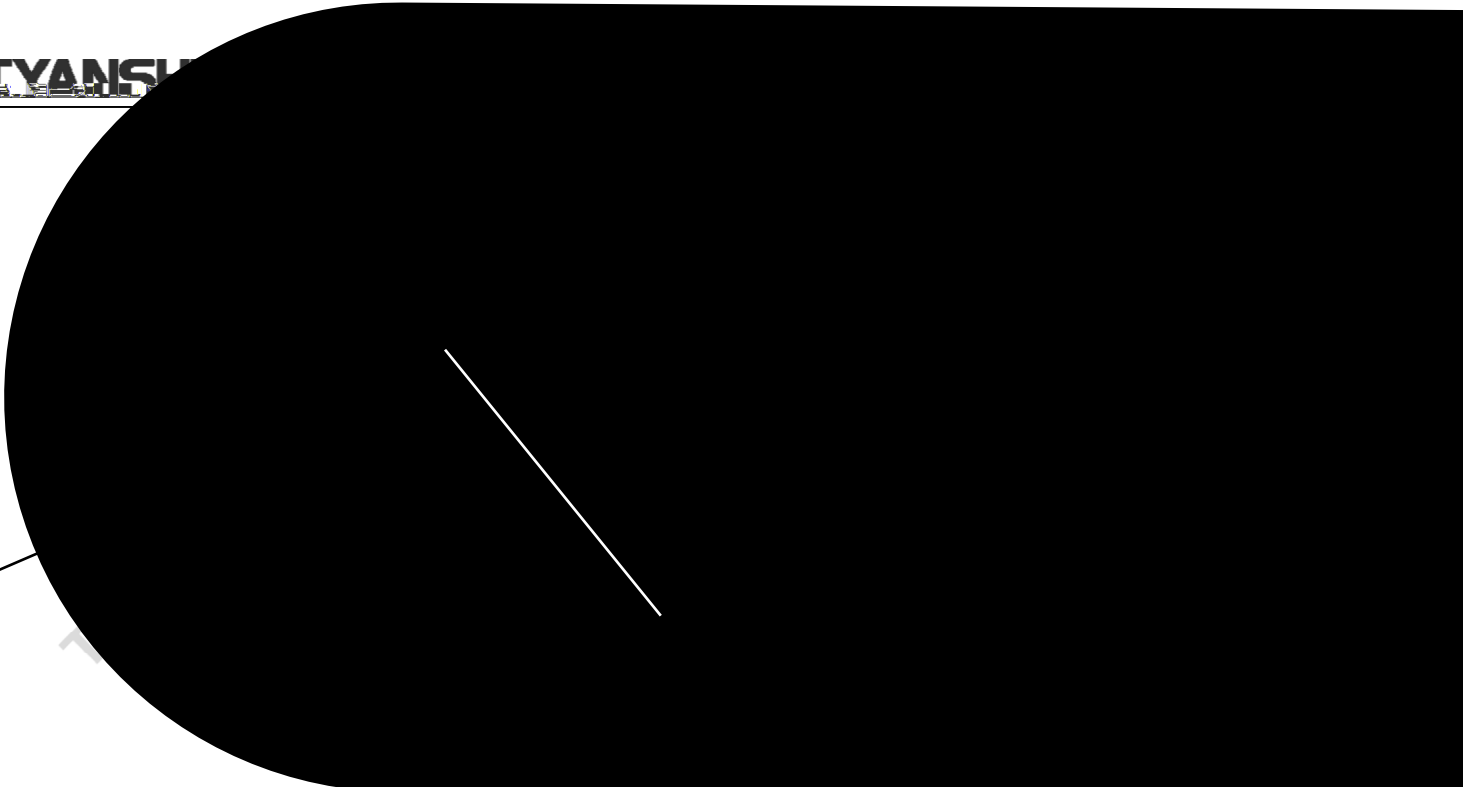

TYANSHINE 广州市深鑫光电有限公司 Guangzhou Tianxin Photoelectric Co., Ltd.

Part No.	TX-G3A140-010G	Spec No.	WKF-BA3070	Page	7 of 8
-----------------	----------------	-----------------	------------	-------------	--------

