

# TX-3535P3FC120-OGHCZA72-02F

## PRODUCT SPECIFICATION

Features:

00


Chip Material:

Emitting Color:

Applications:

.	-	120-	2-02	.	- 0	1
---	---	------	------	---	-----	---

# Package Dimensions:

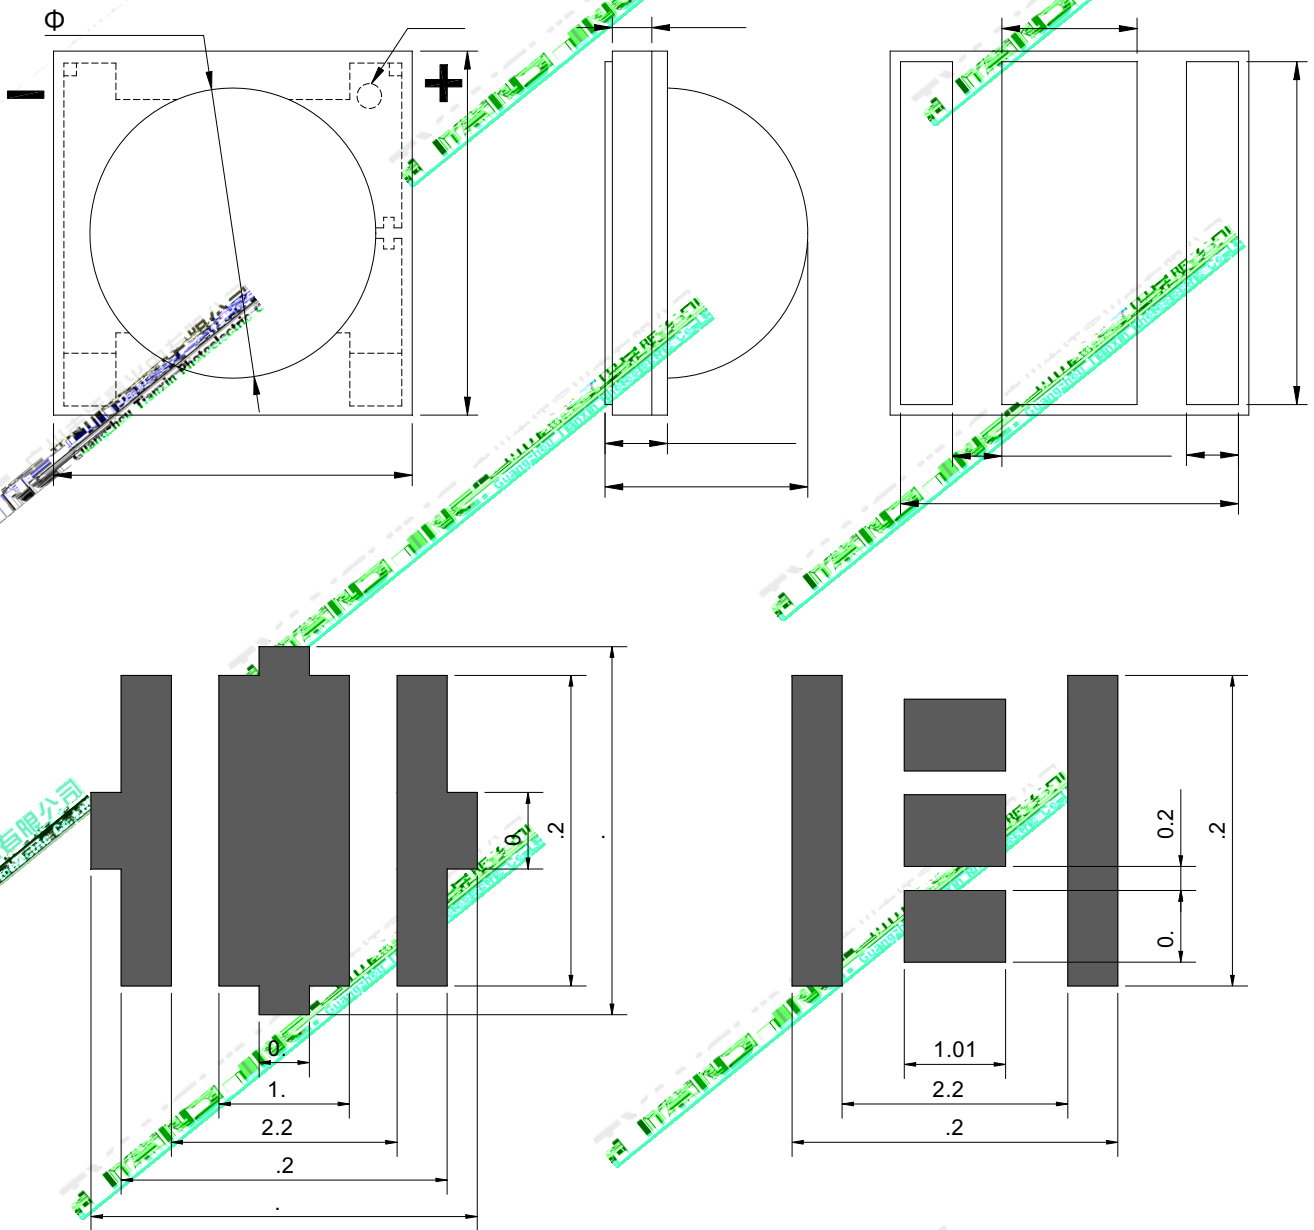

## Notes:

- 1.
- 2.

.	-	120-	2-02	.	-	0	2
---	---	------	------	---	---	---	---

# Absolute Maximum Ratings (Ta=25 )

Parameter	Symbol	Ratings	Unit
		00	
		2 20	
		1 0	
( )		2000	
		- 0 + 0	
		- 0 +	

**Notes:**

- 1.
- 2.

.	-	120-	2-02	.	- 0		
---	---	------	------	---	-----	--	--

## Electrical Optical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
		0	1.0	2.0		
			0	00		
			0	0	10	
			0	0		
			20	2	0	
			.0	.		
0	2 1/2			120		
		0		.		/
	/			-2		/

### Notes:

1.

2. 1/2



1 %.

0.1


.	-	120-	2-02	.	- 0		
---	---	------	------	---	-----	--	--

# Typical Electrical/Optical Characteristics Curves

(2)

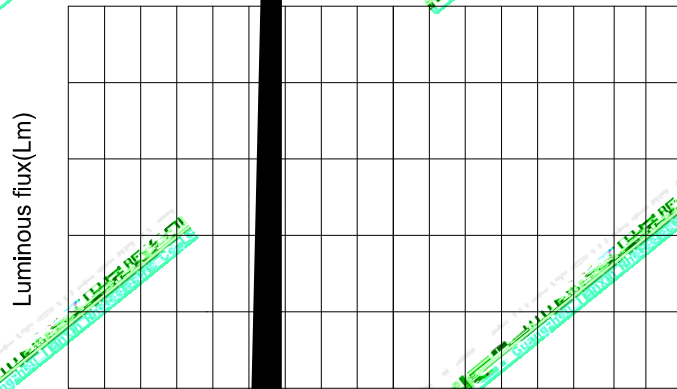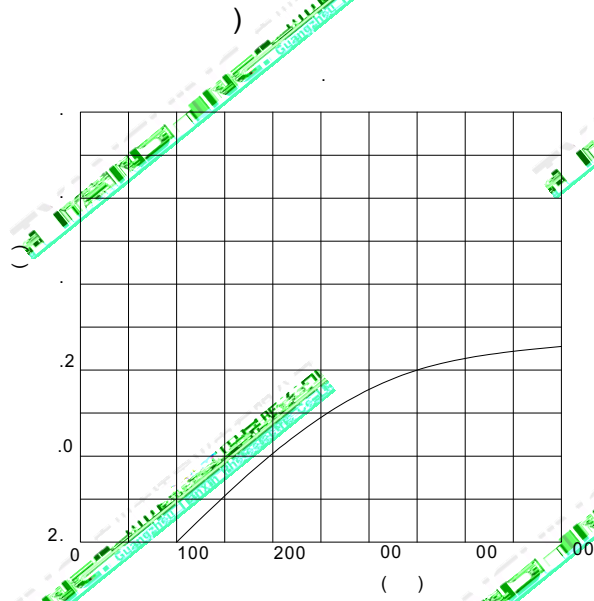

.	-	120-	2-02	.	-	0		
---	---	------	------	---	---	---	--	--

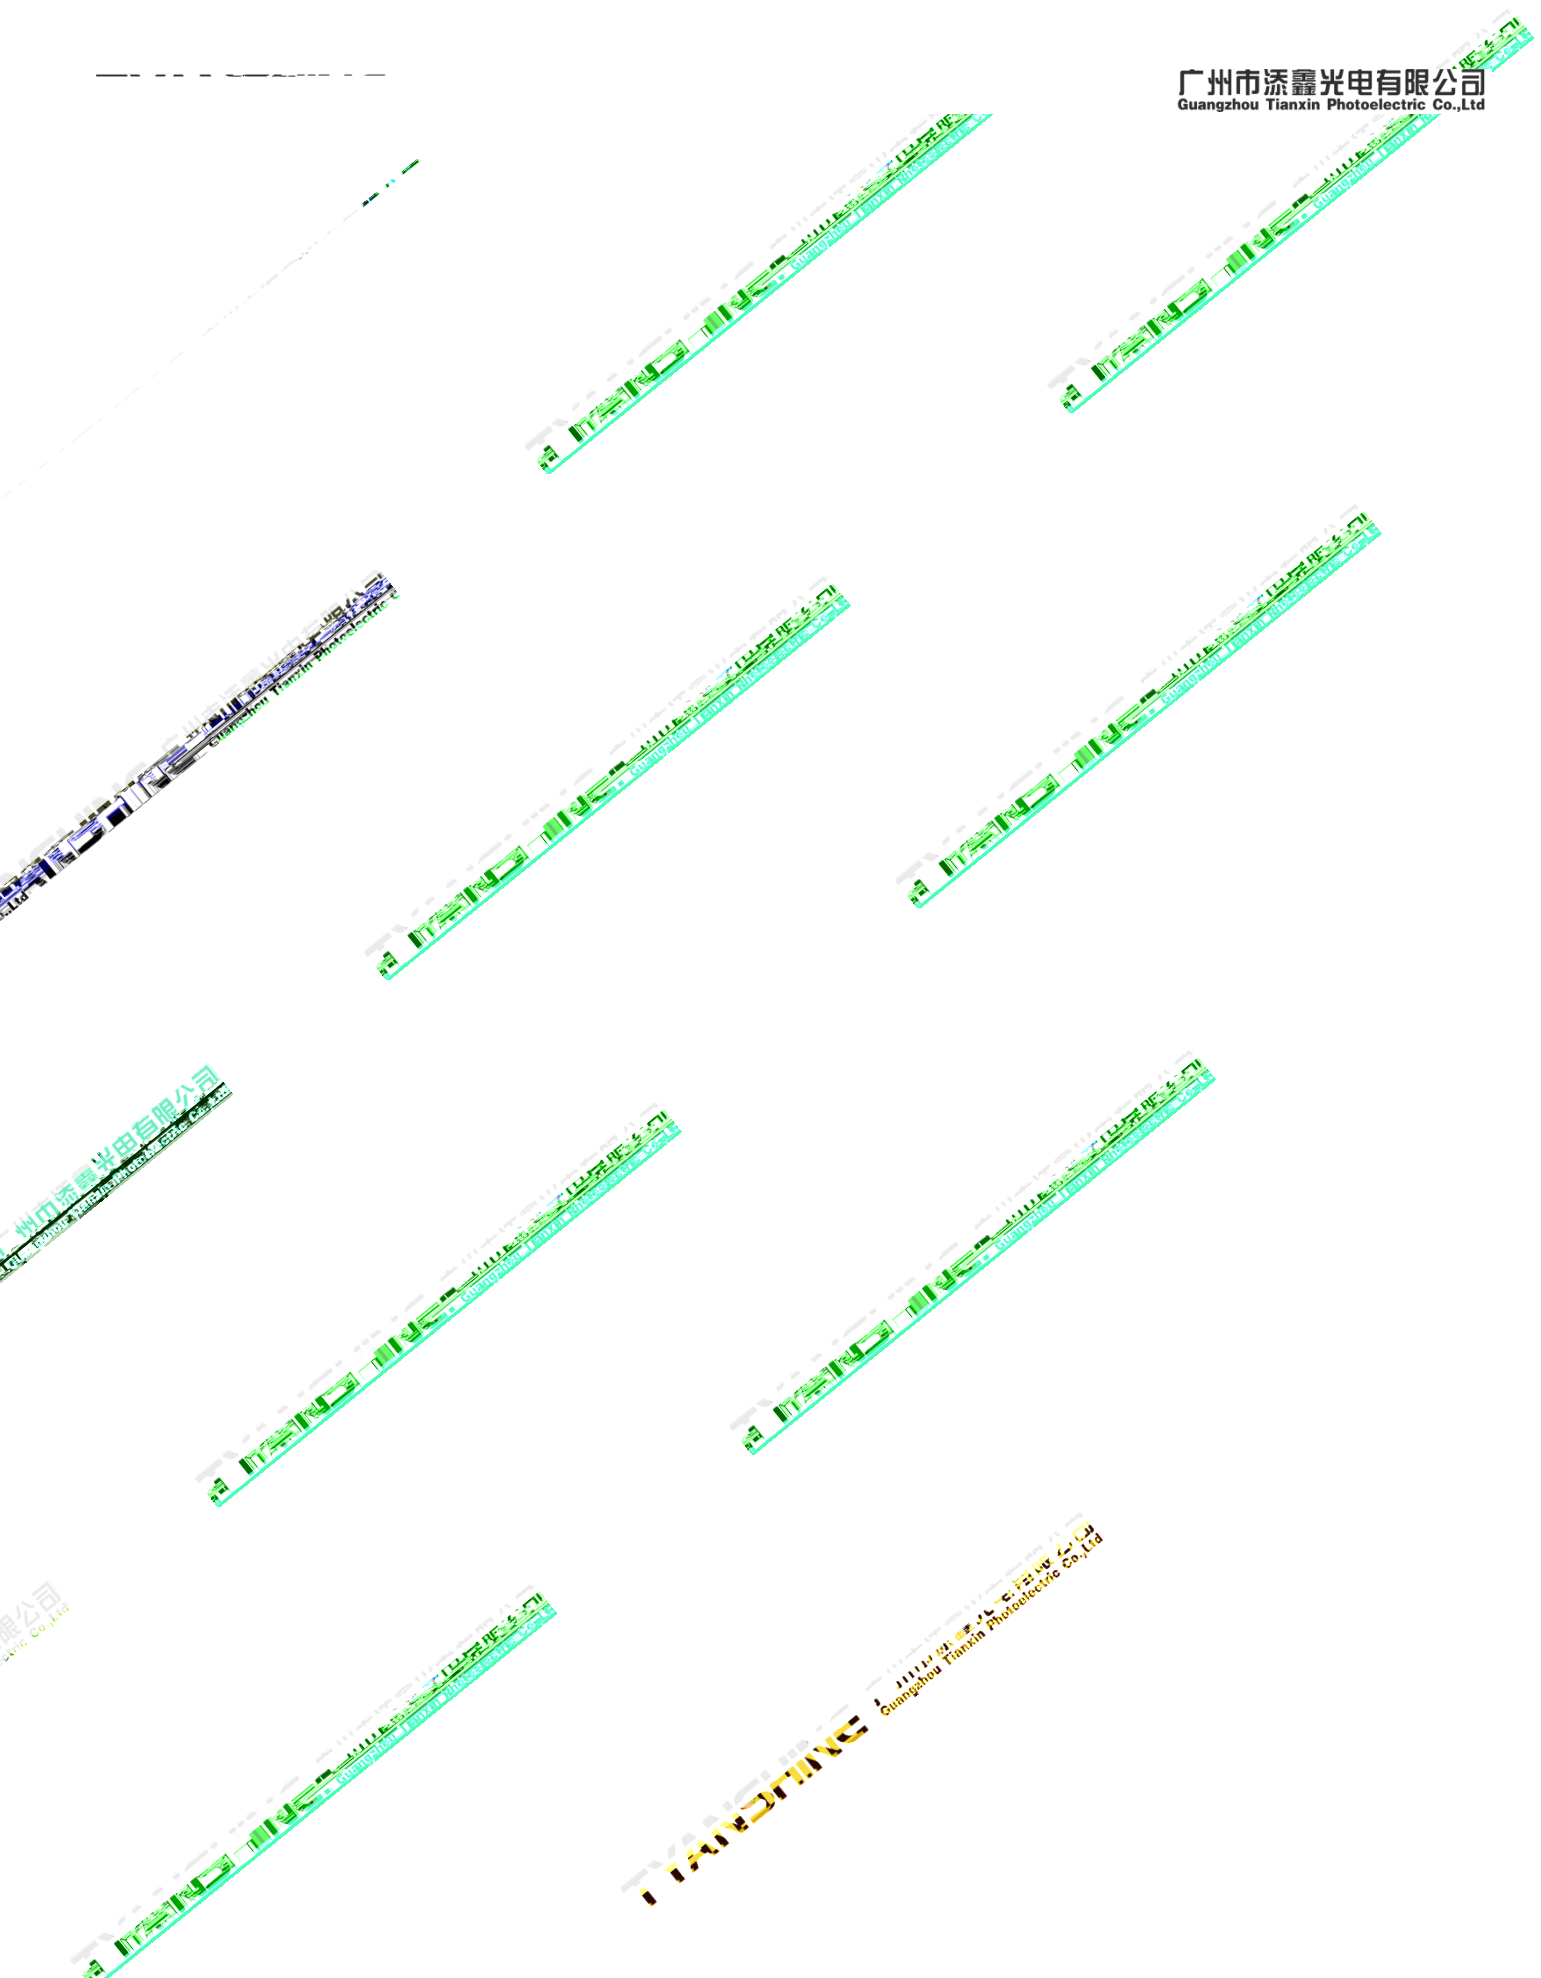

120-

2-02

- 0

//

1.0


# Usage Precautions

## Storage Environment Condition

0 ( 1 )

0%


## Soldering Condition

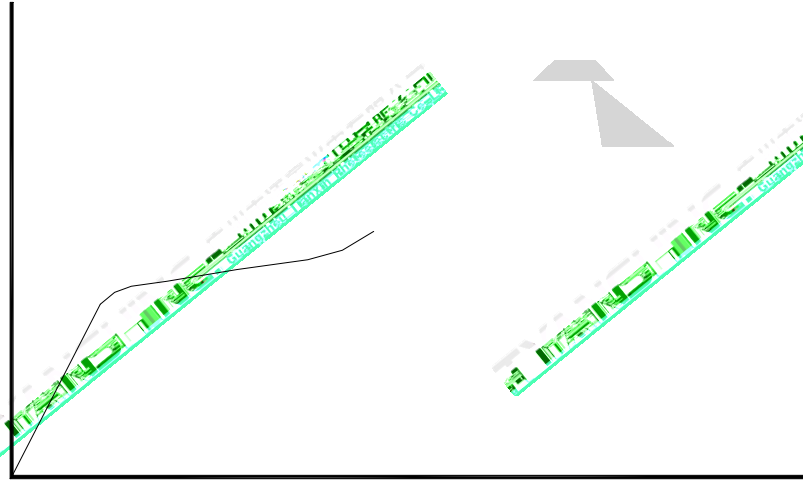

.	-	120-	2-02	.	- 0		
---	---	------	------	---	-----	--	--

# Dimensions For Cannulation And Packaging

Quantity:1000 PCS

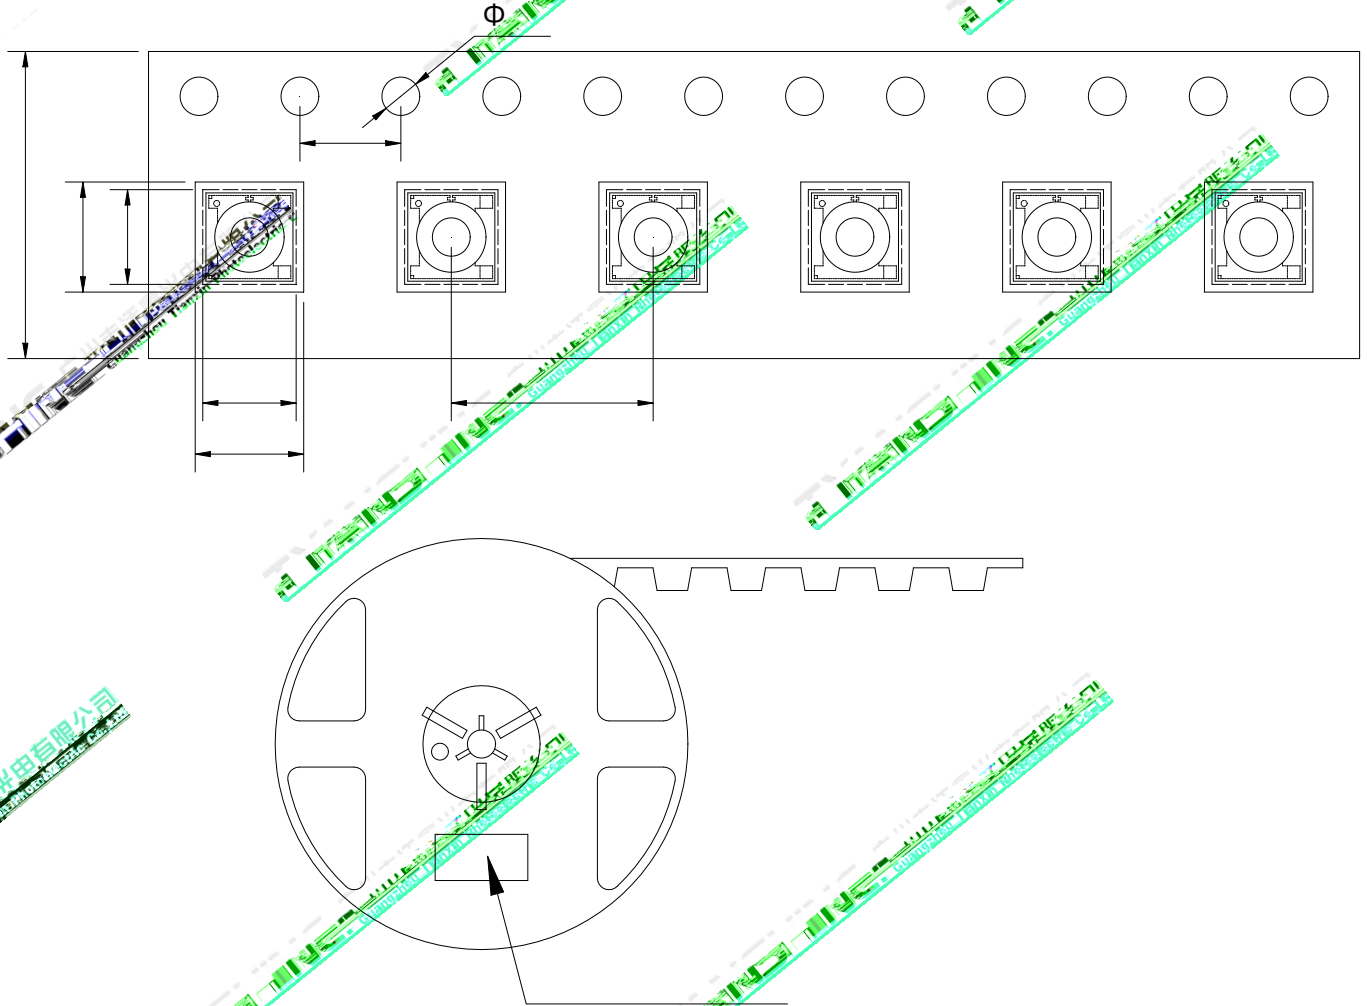

## Notes:

- 1.
- 2.

2.0

	-	120-	2-02	.	-	0		
--	---	------	------	---	---	---	--	--